OPI: Closing Thoughts

Kyle Mestery (Intel)
Kris Murphy (Red Hat)
Paul Pindell (F5)

Why?

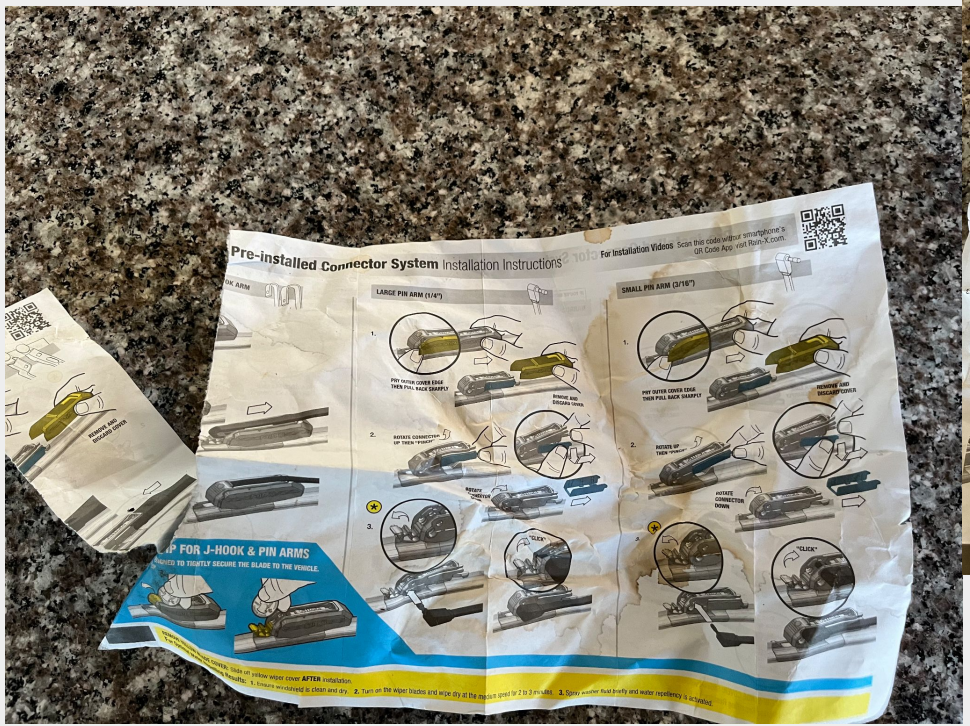
Pre-installed Connector System Installation Instructions
For Installation Videos Scan this code without smartphone's QR Code App, visit Rain-X.com.
LARGE PIN ARM (1/4")
SMALL PIN ARM (3/16")
PRY OUTER COVER EDGE THEN PULL BACK SHARPLY
REMOVE AND DISCARD COVER
ROTATE CONNECTOR UP THEN "PINCH"
ROTATE CONNECTOR DOWN
"CLICK"
REMOVE AND DISCARD COVER
FOR J-HOOK & PIN ARMS
TIGHTLY SECURE THE BLADE TO THE VEHICLE.
Slide off yellow wiper cover AFTER installation.
1. Ensure windshield is clean and dry. 2. Turn on the wiper blades and wipe dry at the medium speed for 2 to 3 minutes. 3. Spray washer fluid briefly and water repellency is activated.

rain-x
Pre-installed Connector System Installation Instructions
For Installation Videos Scan this code with QR Code App
IF YOU'RE UNSURE WHICH OF THESE TWO ARM TYPES IS ON YOUR VEHICLE, USE A PENNY. IT'LL FIT SNUGLY INSIDE THE END OF THE PTB ARM TYPE, BUT WILL NOT FIT
NARROW PTB
PTB
REMOVE AND DISCARD COVER
PRY OUTER COVER EDGE THEN PULL BACK SHARPLY
ROTATE UP THEN "PINCH"
TAB "LOCKS IN"
TO REMOVE: LIFT TAB AND SLIDE CONNECTOR OFF
REMOVE YELLOW BLADE COVER: Slide off yellow wiper cover AFTER installation.
For Optimal Water Repellent Results: 1. Ensure windshield is clean and dry. 2. Turn on the wiper blades and wipe dry at the medium speed for 2 to 3 minutes. 3. Spray washer fluid briefly and water repellency is activated.
© 2015 ITW Global Brands. All rights reserved. FOOAAD_INST

Open Programmable Infrastructure: An Open Source Project

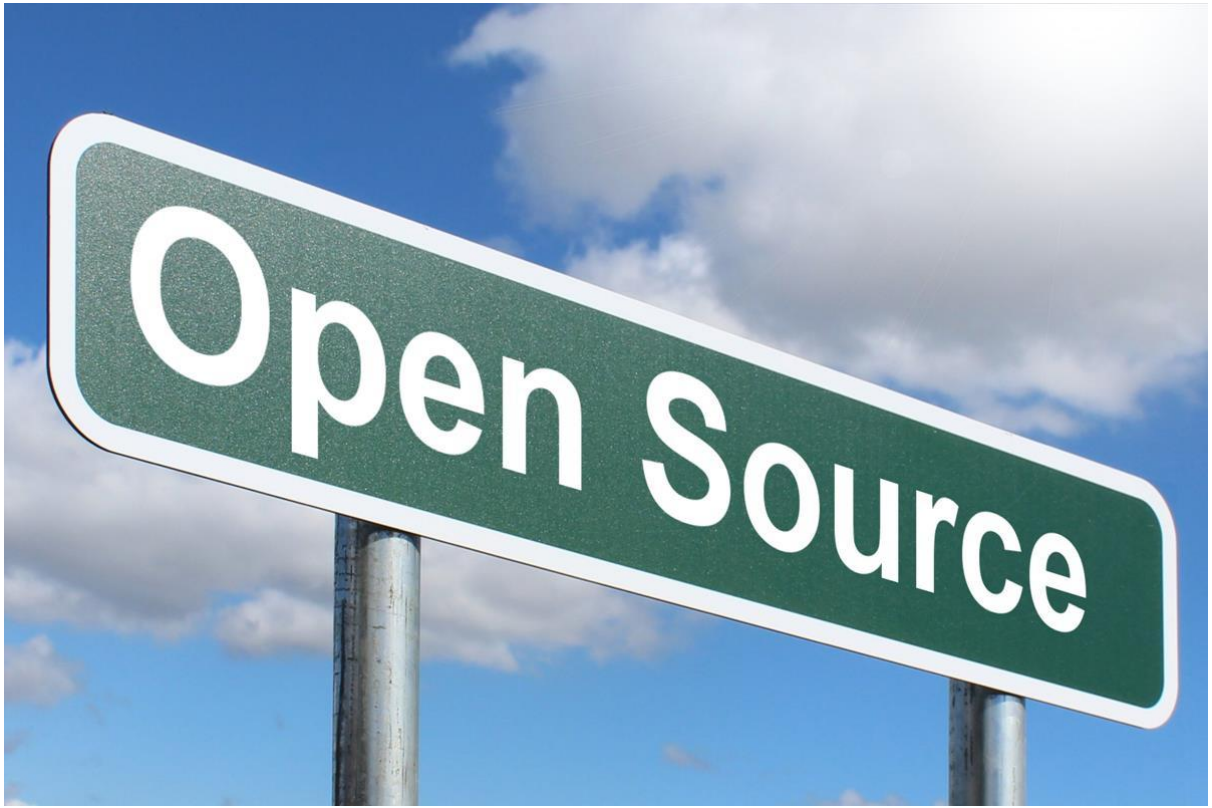

OPI Will Be Joining the Linux Foundation

Code: The Coin of the Realm

Drive Standards Via Code

- Code for all APIs
- Code to make use of APIs
- Test code for everything

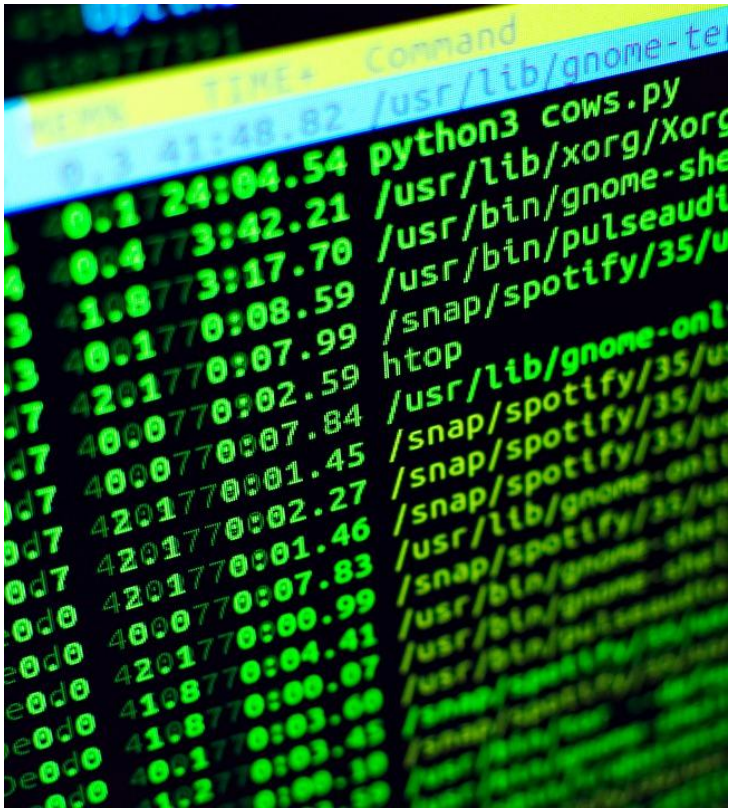

Join the Project

http://opiproject.org/
Google form to request more information or get added to the project

https://ipdk.io/

https://diamond-bluff.github.io/

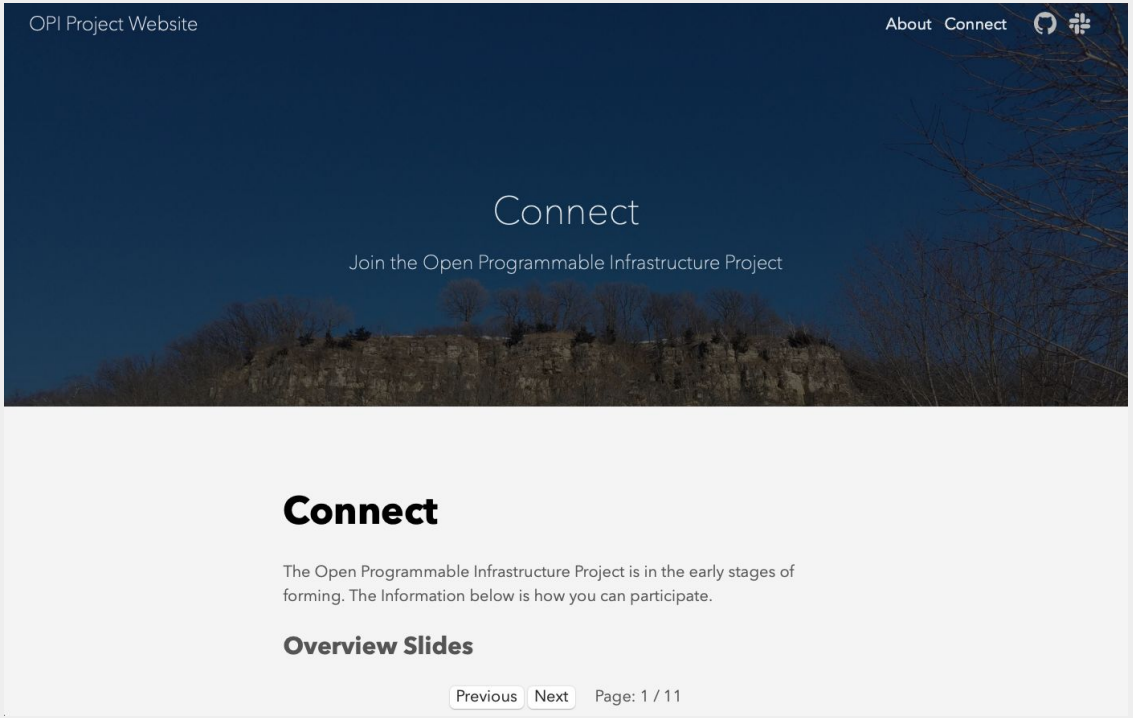

http://opiproject.org/

Q&A

We could not cover all details, so ask away

THANK YOU!